



2820 S. English Station Road - Louisville, KY 40299

TEST NO. 10-408

Paint Arrestance Filter Test Report

page 1 of 1

Test Information

Filter Manufacturer

Hobbs Bonded Fibers

Filter Description

White Nonwoven Batting - Odorless

Paint Description

S.W. H67 RC 65

Filter Dimensions

20"x20"x2"

Paint Spray Method





Binks 80-600 SG2 Plus

Spray Feed Rate

136 gms/min

Air Velocity

150 FPM

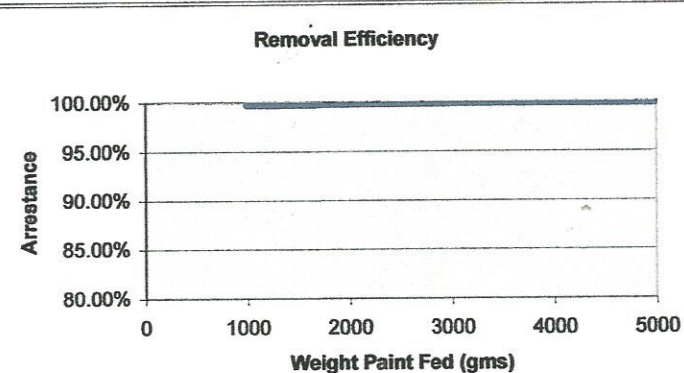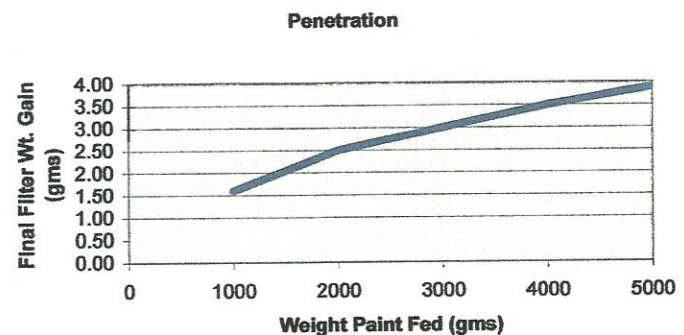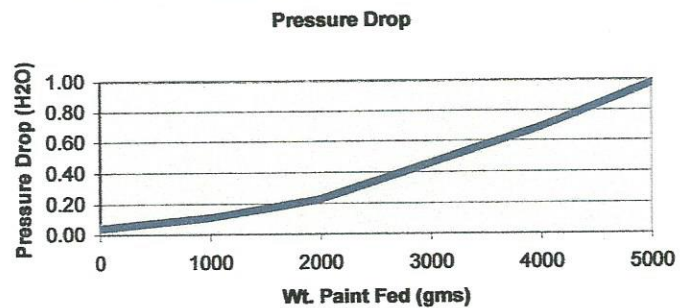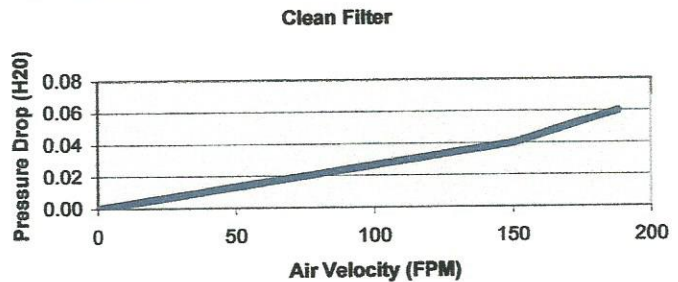

Test Results

Initial Pressure Drop Clean

0.04 Inches w.c.

Final Pressure Drop Loaded

0.98 Inches w.c.

Paint Holding Capacity

2550.8 gms

Paint Run -Off

580.6 gms

Weight Gain-Final Filter

3.9 gms = Penetration

Average Removal Efficiency

99.88%

REMARKS

Requestor Information	Test Requestor	<u>Luke McCracken</u>	Phone Number	NA
	Company Name	<u>Central Texas Filter Service, Inc.</u>	Fax Number	NA
	Company Address	<u>Eddy, Texas</u>	Date Requested	<u>1-Apr-10</u>
Test Operator Information	Test Performed by:	<u>Joe Koenig</u>	Completion Date	<u>7-Apr-10</u>